



# megamount 2-26T2 / 2-26T

TYRE CHANGER  
FOR TRUCK MOBILE  
ROADSIDE SERVICE

MOBILE  
SERVICE

UP to  
26"

megamount 2-26T

UP to  
30"

megamount 2-26T2

LEVER  
LESS

TOOL  
HOLDER

CONTROL  
UNIT



megamount



*New Hofmann Megaplan Tyre Changer designed for mobile service on trucks and buses wheels up to 26" (megamount 2-26T) and up to 30" (megamount 2-26T2). Mounted at the rear of the vehicle, the new right-facing chuck allows to work safely at the roadside.*

**ALWAYS TANGENT** working system:  
the roller and/or the leverless tool  
always work in an ideal position,  
tangent to the edge of the rim, so as  
not to damage both the tire and the  
rim itself.



*megamount 2-26T2 : model with right-hand  
chuck orientation*

*megamount 2-26T : model with  
left-hand chuck orientation*



Standard  
foot  
support  
H=700 mm.

# megamount 2-26T2 / 2-26T

TYRE CHANGER FOR TRUCK  
MOBILE ROADSIDE SERVICE



## Self-centering chuck

The self-centering chuck, mounted on the movable spindle arm, has 4 jaws with locking capacity from 13" to 26" (megamount 2-26T) and to 30" (megamount 2-26T2). The clamping points of the jaws ensure a perfect clamping of any type of rim.




## Portable control unit

The machine is equipped with a low voltage portable control unit, easily movable inside the working area. The rational lay-out of control levers, buttons and pedals prevents the operator from making accidental operational errors. Available in two versions: via cable and via radio transmission.



## Leverless system

It is equipped with roller, for a quick demounting/mounting procedure, or with a leverless system by means of a nail to reduce bending and tension on the heel and on the rim edge. It minimizes the physical effort of the operator.

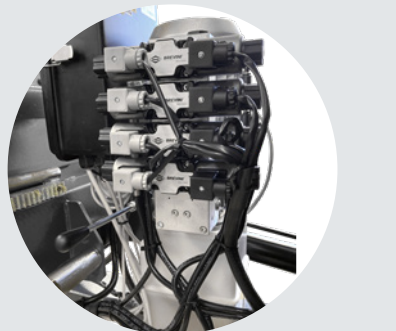

## Emergency manual pump

In case of failure of the electrical / hydraulic system, the work unit always returns to the van. Automatic motor stand-by in case of prolonged non-use to reduce energy expenditure.



## Security Micro-switches

They prevent any damage to the equipment and to the van.

## Standard accessories



Bead lever



Aluminum rim clamp

## Optional accessories



Steel bead breaker disc



Ring protection for 22,5" alloy rim



Set of 4 plastic protections for aluminum rims with locking rotation pin



Clamp for aluminium rims



Passenger wheel kit for car wheels



Support foot extension for installation at a height greater than 70 cm

## Versions on request:

**Single speed version:** 230V/50Hz/3ph

**Single speed version:** 230V/60Hz/3ph

**megamount 2-26T/megamount 2-26T2:**

version with data transmission via cable

**megamount 2-26T R/**


**megamount 2-26T2 R:**

version with data transmission via radio

**Version with generator+compressor:**


Optional power unit

(generator+compressor), as an ideal mobile workstation that allows you to work on the road with the same features and performances as in your tyre service workshop.

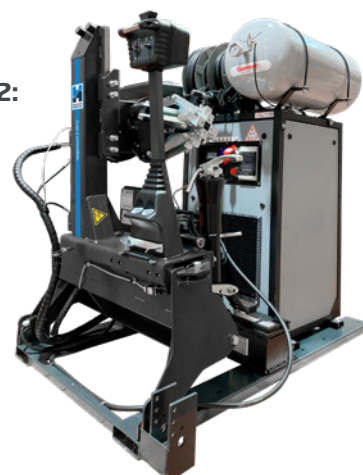

## Paguro P2

Hofmann suggests the combination with Paguro P2, the space-saver handspin balancing system for truck and bus wheels

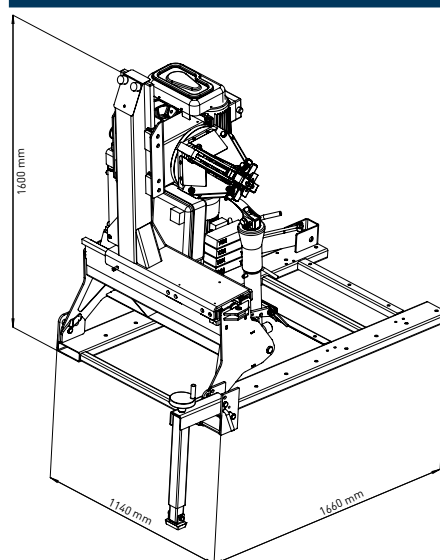

## Technical Data

Internal clamping

13" - 26" (megamount 2-26-T)

Max wheel diameter

13" - 30" (megamount 2-26-T2)

Max wheel width

1380 mm (54")

Max bead-breaking power

930 mm (37")

3-Phase

19500N

Turntable speed

kW 400V - 50Hz (1 speed)

Operating pressure

7 rpm (3ph - 1 speed)

Noise level

8 - 12 bar (116 - 174 psi)

Net weight

< 70 ± 3 dB (A)

530 kg



**HOFMANN MEGAPLAN GmbH**

Hüttenstrasse 7 - 67550 Worms - Germany

T +49 (0)6242 913 6666

hm-mail@hofmann-megaplan.com

www.hofmann-megaplan.com

AGHS36120